



*WORLD'S LEADER  
IN BREAD SLICING*

**MONOFLEX &  
MULTIFLEX  
CHAIN**

# REPLACEMENT CHAIN


Hansaloy replacement Monoflex (cooler) and Multiflex (conveyor) chain for Stewart style conveyors. To give you the highest tensile strength and longest wear life in the industry, Hansaloy's quality features add up to longer service life and lower over-all chain replacement costs.

Chain	Frame	Width	Wire Length
<b>MONOFLEX</b>	22"	20 5/8"	10"
	26"	24"	11 3/4"
<b>MULTIFLEX</b>	19"	17 1/2"	8 1/4"
	20"	18 1/2"	8 3/4"
	22"*	20 1/2"	9 3/4"
	23"	21 1/2"	10 1/4"
	26"*	24 1/2"	11 3/4"

*\*Most common sizes, other size chain available on request.*

### Seam-Oriented Bushings

assures uniform contact which reduces both initial wear and elongation.

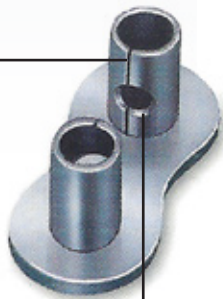

### Solid Rollers

smooth surface for longer wear life.

### Oil ports


provide a reservoir for extra lubricant which reduces chain wear.

### Component plating

before assembly assures maximum corrosion resistance.

### Quad staking

pins to the attachment plates, produces higher push-off values.

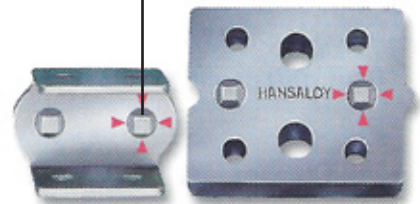

### Case hardened


pins, bushings and rollers produce longer chain life.

### Stainless steel wires

are securely crimped into the attachment plates.

### Reinforced connection links

with four times the surface contact area between the pin and the attachment plate.

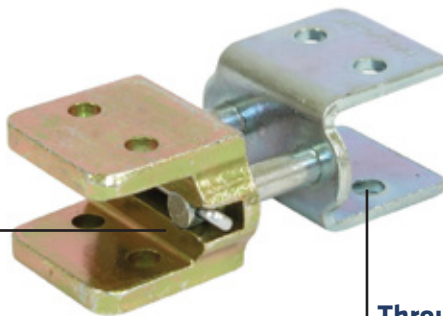


### Through-hardened

attachment plates reduce wire wing looseness caused by plate wear.

### Replacement Wires

Available separately including wires with offset bends for conveyor inclines.

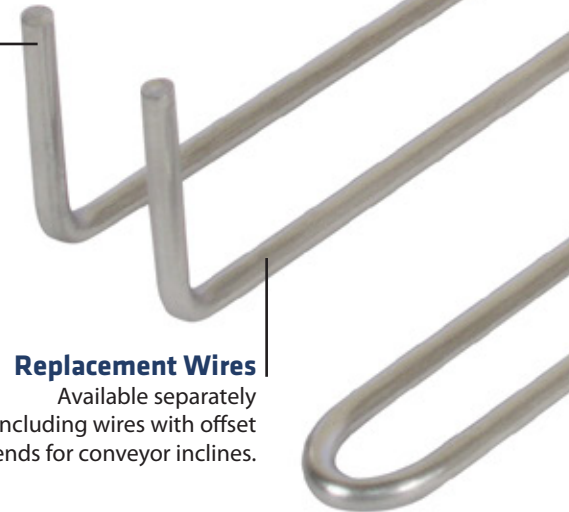

WORLD'S LEADER  
IN BREAD SLICING

**HANSALOY®**



Phone: 563-386-1131 • 800-553-4992  
 Fax: 563-386-7707  
 820 West 35th Street  
 Davenport, IA 52806  
 www.hansaloy.com • sales@hansaloy.com